




RAIMONDI®
SINCE 1863

LR 213
14 t

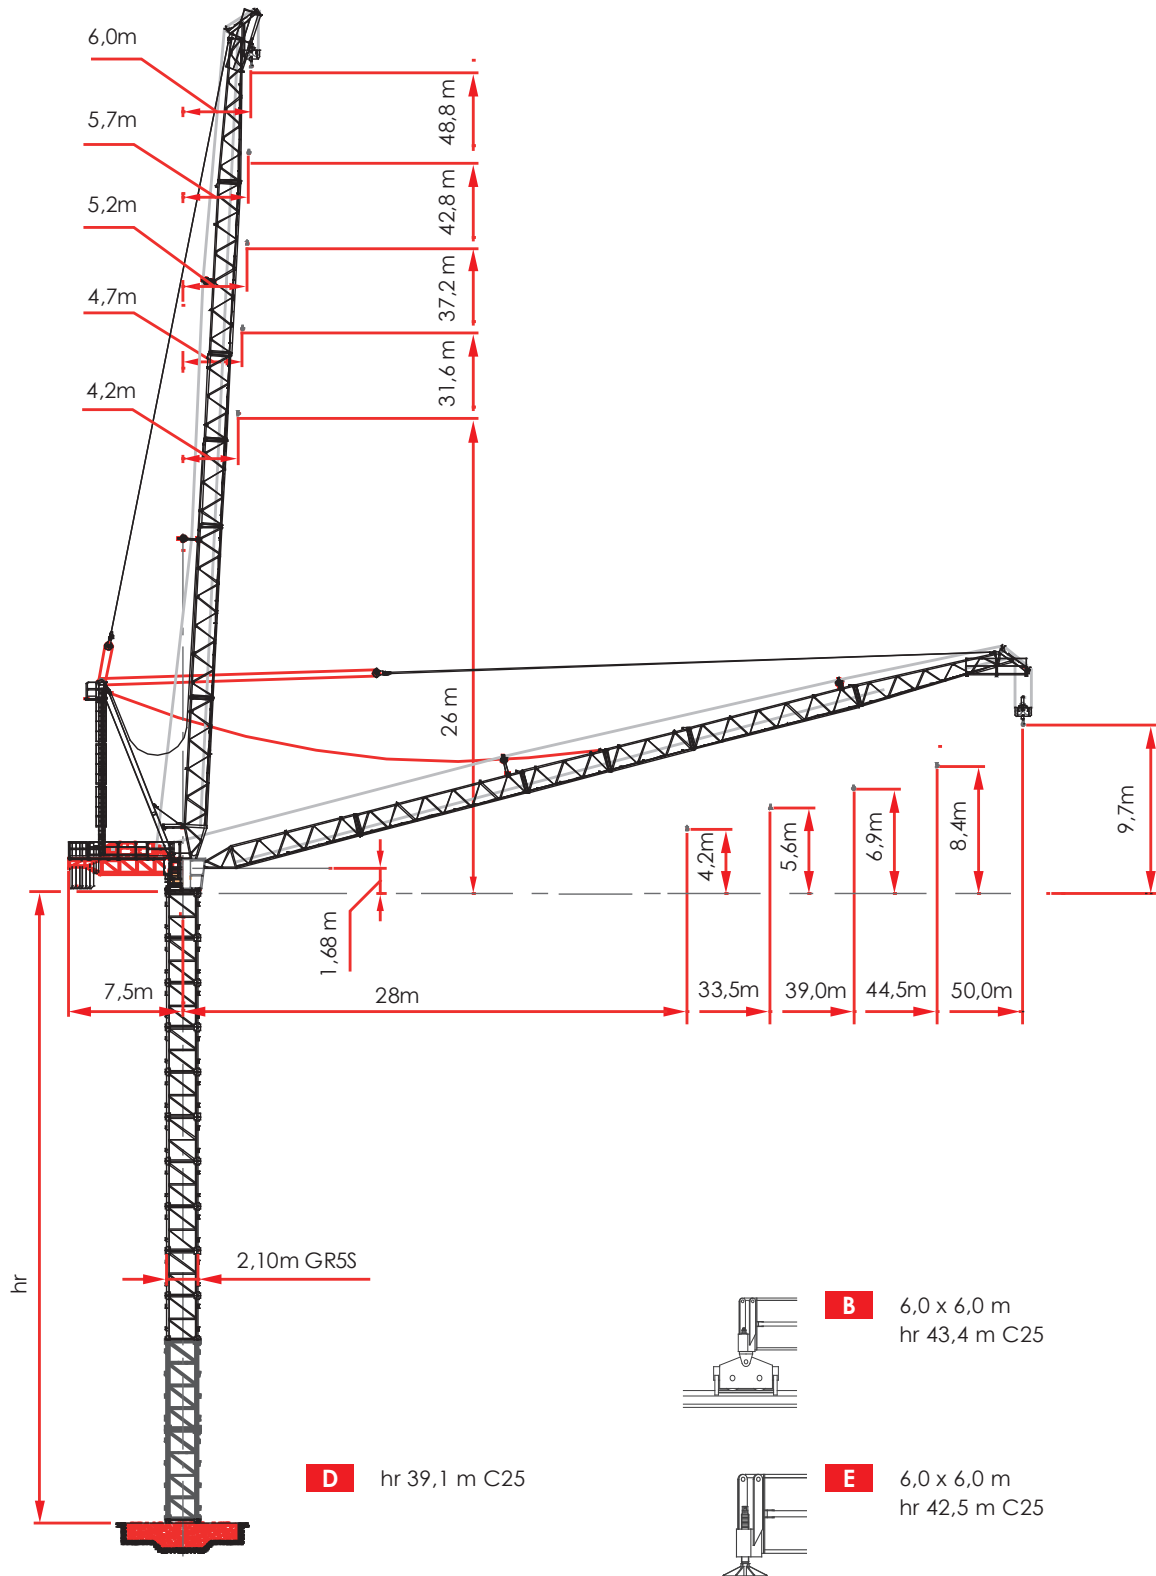

LR 213 - Load diagram 14.0T_UL

Jibs	22,5 m	28,0 m	33,5 m	39,0 m	44,5 m	50,0 m
18	14000	14000	14000	14000	14000	14000
19	14000	14000	14000	14000	14000	14000
20	14000	14000	14000	14000	14000	14000
21	14000	14000	14000	14000	14000	14000
22	13967	13715	14000	14000	13588	13847
22,5	13350	13325	14000	13706	13186	13430
23		12934	13694	13298	12784	13012
24		12204	12945	12552	12048	12248
25		11514	12254	11866	11372	11548
26		10851	11611	11232	10750	10903
27		10195	11011	10644	10174	10307
28		9500	10448	10097	9639	9754
29			9915	9586	9142	9240
30			9407	9107	8677	8761
31			8919	8657	8242	8314
32			8440	8231	7833	7894
33			7956	7827	7449	7500
33,5			7000	7635	7267	7314
34				7443	7085	7128
35				7074	7000	7000
36				7000	6794	6775
37				6772	6476	6456
38				6418	6172	6153
39				6050	5881	5864
40					5601	5589
41					5329	5326
42					5064	5074
43					4802	4832
44					4538	4598
44,5					4400	4485
45						4373
46						4153
47						3939
48						3728
49						3517
50						3300

14,0 t 100 hp 73,5 kW

		STEP	 m/min	 kg	 m/min	 kg
 900	m	1	8	7000	4	14000
 000	kVA	2	30	7000	15	14000
 Ø 16	mm	3	52	7000	26	14000
		4	92	4000	46	8000
		5	140	2000	70	4000

kVA Power required / Potenza richiesta / Puissance requise / Erforderliche Leistung / Потребляемая мощность



0 / 0,7 r.p.m. • 2 x 4 kW /



14,5° / 85° • 1,9 / 0,7 m/min • 55 kW /



18 m/min • 4 x 4 kW